




MITECH[®]
LEADING PERIMETER SECURITY

GAR POW

Power supply for columns 12/1.5 – 24/2

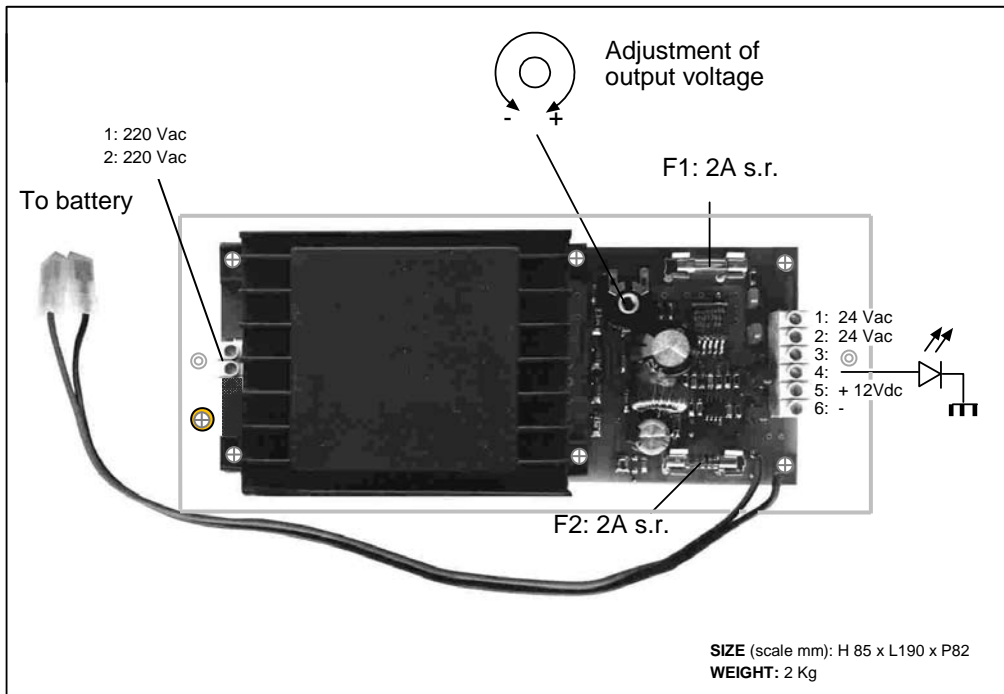

TECHNICAL SPECIFICATIONS

POWER SUPPLY	220 Vac +/- 10%
OUTPUT	12,5 ÷ 14,3Vcc Calibration 13,8 @ 0,8A Max. supplied current 1,5 Adc / 2 Adc
LED 1 green	When on, indicates that the 24 VAC output is working correctly
LED 2 green	When on, indicates that the 12 V DC output is working correctly
LED 3 red	When on, indicates that the current load is above 1.5 A DC
LED 4 red	When on, indicates that the battery protection fuse has triggered (F2)
F1	Protection fuse of 24 VAC output (2A sr)
F2	Protection fuse against battery polarity reversal and overload (2A sr)
Fault output	Indicates the absence of power supply from the mains (normally high)